

SERENIX INSTALLATION SERIES

SR-OFD-106

5.25" two-way cabinet for 100 V / 70 V lines — compact, quick to install, easy on interiors.

A commercial PA cabinet for distributed speech and background music in schools, offices, hotels and airport terminals. The two-way 5.25-inch system runs directly from a 100 V or 70 V line with selectable power tapplings, or from an 8 Ω amplifier output. A slender ABS enclosure and supplied stainless bracket keep installation fast and the finished room uncluttered.

|              |            |         |                |                  |
|--------------|------------|---------|----------------|------------------|
| 30 W         | 100 / 70 V | 115 dB  | 5.25"          | 120° × 110°      |
| RATED OUTPUT | LINE INPUT | MAX SPL | TWO-WAY SYSTEM | DISPERSION H × V |



FEATURES

- 01

100 V / 70 V line ready

Selectable 30 / 15 / 7.5 W tapplings for distributed systems, plus an 8 Ω low-impedance option.
- 02

Two-way 5.25" system

Dedicated woofer and tweeter deliver balanced intelligibility for paging and background music alike.
- 03

Fast, secure installation

Supplied stainless steel mounting bracket allows quick angling and fixing to walls or columns.
- 04

Discreet cabinet design


Slim ABS enclosure with metal grille is designed to sit quietly within finished interiors.

SPECIFICATIONS

|                              |                                  |
|------------------------------|----------------------------------|
| Description                  | 5.25" two-way wall-mount speaker |
| Rated power output           | 30 W                             |
| Power tapping @ 70 V / 100 V | 30 / 15 / 7.5 W                  |
| Line input                   | 100 V or 70 V; 8 Ω selector      |
| Frequency response           | 100 Hz–20 kHz                    |
| Frequency range              | 20 Hz–20 kHz                     |
| SPL (@ 1 W / 1 m)            | 115 dB                           |
| Speaker unit                 | 5.25" woofer + 1.5" tweeter      |
| Dispersion (H × V)           | 120° × 110°                      |
| Dimensions                   | 185 (W) × 170 (D) × 257 (H) mm   |
| Material                     | ABS enclosure with metal grille  |
| Mounting                     | Supplied stainless steel bracket |
| Weight                       | 2.5 kg                           |


Dimensions and weight are nominal, per manufacturer data.

FREQUENCY RANGE



Rated response shown solid; extended frequency range shown tinted. Per published specification.

COVERAGE

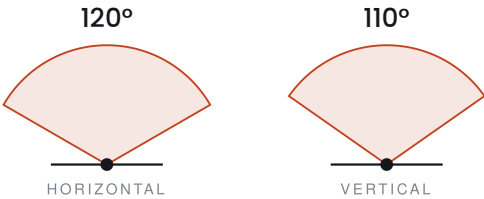

APPLICATIONS

- Schools
- Offices
- Hotels
- Airport terminals
- Retail
- Sound reinforcement
- Background music